

Thank you for purchasing your RBSM CORP product.

We take pride in everything we produce.

If you purchased from anywhere other than our RBSM Marketplace, please do not return your product to the store directly.

If you have any issues or questions regarding our products, please email us at support@rbsmcorp.com

Remember to sign up for our exclusive member discounts at www.rbsmcorp.com

Dear Customer

In purchasing this bicycle you have chosen a product of high quality and technology. Each component of your new bicycle has been designed, manufactured and assembled with great care and expertise.

These operating instructions contain a wealth of information on the proper use of your bicycle, its maintenance and operation as well as interesting information on bicycle design and engineering. Please read these instructions thoroughly. We are sure that even if you have been cycling all your life you will find useful and detailed information.

Bicycle and E-bike technology has developed at a very rapid pace during recent years. Therefore, before setting off on your new bicycle, be sure to read at least the chapter "Quick start" first.

The individual steps are subsequently explained in detail, supplemented by illustrations and diagrams. For more detailed information on your E-bike, refer to "Technical data".

Even a manual as big as an encyclopedia could not describe every possible combination of bicycle models and components or parts on the market. These operating instructions therefore focus on your newly purchased bicycle and standard components and provide useful information and warnings.

When doing any adjusting or servicing, be aware that the detailed instructions and information provided in these operating instructions only refer to this city/road/mountain bicycle or E-bike.

The information included here is not applicable to any other bicycle type. As bicycles and E-bike come in a wide variety of designs with frequent model changes, the routines described may require complementary information. Comply also with the instructions of the parts manufacturers, which you can find on the enclosed information.

Be aware that these instructions may require further explanation, depending on the experience and/or skills of the person doing the work. For some jobs you may require additional (special) tools or supplementary instructions. This manual cannot teach you the skills of a bicycle mechanic.

This manual cannot teach you how to ride. Please be aware that cycling is a hazardous activity that requires the rider to stay in control of his or her bicycle at all times.

Like any sport, cycling involves the risk of injury and damage. Keep this in mind. When you decide to ride a bicycle or E-bike you need to accept the risk inherent to cycling.

WARNING:

This symbol indicates an imminent risk to your life or health, unless you comply with the corresponding handling instructions, given or take preventive measures.

CAUTION:

This symbol warns you of incorrect actions that could result in damage to property and the environment.

NOTE:

This symbol provides you with information about how to handle the product or refers to a passage in the operating instructions that deserves your special attention.

Content

The bike and its components	5-6
I. SAFETY WARNINGS	7
I-1. Basic safety information	7
I-2. For your own safety	7
I-3. Information for parents and legal guardians	7
I-4. Safety in road traffic	7
I-5. Bike safety	8
II. Quick Start Guide:	9
III. Setting up the bike for the rider	10
III-1. Fitting the pedals	10
III-2. Adjusting the seat position	10
III-3. Adjusting the handlebar position	12
IV. Frame	13
V. Headset	13
VI. Fork	14
VII. Chain rings	14
VIII. Bottom bracket and cranks	14
IX. Wheels	14
IX-1. Checking the wheels	14
IX-2. Checking the hubs	15
IX-3. Checking the rims	15
IX-4. Tyres	15
X. Brake, brake levers and brake systems	16
X-1. Important information and precautionary measures	17
X-2. Brake lever	17
X-3. Disc brakes	18
XI. Bike gears	20
XI-1. Derailleur gears	20
XI-2. Shifting lever	21
XI-3. Rear derailleur	22
XII. Bike chain	23
XIII. Electric system	24
XIII-1. E-bike fundamental legal principles	24
XIII-2. These statutory requirements apply for a E-bike	24
XIV. Control panel (display)	25
XIV-1. Product model	25
XIV-2. Specifications	25
XIV-3. Appearance and Size	25
XIV-4. Function Summary	26

XIV-5.	Features.....	26
XIV-6.	General Operation	27
XIV-7.	Settings.....	31
XIV-8.	Quality Assurance and Warranty Scope.....	34
XIV-9.	Operation Cautions.....	35
XV.	Assistance by the electric motor	36
XV-1.	Operating principle of assistance.....	36
XV-2.	Distance.....	36
XVI.	Battery	36
XVI-1.	Straightforward charging.....	37
XVI-2.	High degree of safety due to battery management.....	37
XVI-3.	Straightforward storage	37
XVI-4.	Battery information system	38
XVI-5.	Service life and warranty	38
XVI-6.	Battery Holder.....	38
XVII.	Charger	39
XVII-1.	Structure Diagram of Charger.....	39
XVII-2.	Charge Curve Graph	39
XVIII.	Care and maintenance of the bike	40
XVIII-1.	Care	40
XVIII-2.	Wear parts	40
XVIII-3.	Tires.....	41
XVIII-4.	Rims in conjunction with rim brakes	41
XVIII-5.	Brake pads.....	41
XVIII-6.	Brake discs	41
XVIII-7.	Bike chains or toothed belts.....	41
XVIII-8.	Chain rings, sprocket wheels and jockey wheels	41
XVIII-9.	Lamps of lighting set.....	41
XVIII-10.	Handlebar tapes and handle grips.....	42
XVIII-11.	Hydraulic oils and lubricants	42
XVIII-12.	Gear-shift and brake cables.....	42
XVIII-13.	Paint finishes	42
XVIII-14.	Bearings.....	42
XIX.	Regular inspections	42
XX.	Technical data	43
XX-1.	Maximum permitted gross weight of bike	43
XX-2.	Tightening torques for screw connections	43
XX-3.	Tires and tire pressure.....	44
XXI.	Warranty conditions	44
XXI-1.	Prerequisites for the validity of warranty claims.....	45
XXI-2.	Warranty exclusions	45

The bike and its components

Mud Adder



Viper



Copperhead



Copperhead ST



Anaconda



Preface

Keep in mind that every bicycle type is built for a specific intended use. Be sure to use your bicycle only according to its intended use, as it may otherwise not withstand the stress and would fail and cause an accident with unforeseeable consequences!

1. City/Road E-BIKE are intended for hard-surface roads, i.e. for tarred roads and bicycle lanes or gravel field tracks. Observe the traffic rules when cycling on public roads. City/road bicycle are not suitable for off-road use. Using bicycle off-road can result in crashes with unforeseeable consequences.
2. Mountain bike are suitable for off-road use; they are, however, not designed for dual, dirt, downhill and free-ride cycling etc.

All regulations that apply to bicycles, also apply to E-bike, i.e. they are allowed to or must use cycle paths without any restrictions. Wearing a helmet is recommended, but not compulsory.

I. SAFETY WARNINGS

I-1. Basic safety information

Please read all the warnings and information in this User Manual carefully before using the bicycle. Keep this User Manual near your bicycle for ready reference. If you lend this bicycle over to someone else, don't forget to give them the User Manual as well.

I-2. For your own safety

WARNING:

- **Wear bright clothing or reflective elements so that other road users can see you in good time.**
- **Wear shoes with a stiff, and whenever possible, non-slip sole.**
- **Wear close-fitting clothing on your legs, or wear trouser clips.**
- **Wear protective clothing such as robust shoes and gloves.**

I-3. Information for parents and legal guardians

NOTE:

- **Make sure that your child has been taught, and also understands, how to handle the bike safely and responsibly in the environment in which it is going to be used.**
- **Explain to your child how to operate all the brakes, and also how they work and any special features.**
- **As the legal guardian, you are responsible for the safety of your child and any damage he/she may cause when cycling. You should therefore make absolutely sure that the bike is in technically sound condition and adjust it regularly to the size of the child.**

I-4. Safety in road traffic

NOTE:

- **Observe the applicable traffic regulations.**
- **Never ride with no hands!**
- **In some countries children below a certain age must ride on the pavement and must also dismount when crossing the road. Please familiarize yourself with the applicable**

regulations.

- Adjust your handling on wet or slippery roads; ride more slowly and brake carefully and in good time as you will require a much greater braking distance.
- Adopt a speed that reflects the terrain as well as your riding ability.
- Do not listen to music through headphones when cycling.
- Do not cycle when using a mobile phone.
- Use designated cycle paths when not using public roads.
- Be ready to brake, especially if you are not sure what lies ahead or are riding downhill

I-5. Bike safety

NOTE:

- Only bikes that have been approved for use in public places, as per the applicable regulations (e.g. StVZO in Germany), may be used.
- Observe the maximum permitted gross weight of the various bike types, as this could otherwise lead to breakage or failure of safety-relevant components. The brake system is also only designed for the maximum permitted gross weight of the bike. For a list of the maximum permitted gross weights, refer to bike ‘Technical data’. The gross weight is the sum of the weight of the bike + weight of the rider + weight of the luggage. The gross weight also includes towed weights such as trailers.
- If you notice that a part is damaged or warped, do not use the bike until you have had the part replaced as otherwise parts that are important to operation of the bike may fail.
- Observe the maximum load-carrying capacity of the rack. This is marked on the rack directly.
- If you make technical changes to your bike, take the national traffic regulations and applicable standards into account. Bear in mind that this could render your warranty invalid.
- Only replace electrical components on your bike with type-tested parts. Disassemble the battery pack and modify the unit or your warranty will be void and you will be responsible for the modification.
- Only ride with suitable lighting in unfavorable lighting conditions such as fog, rain, dawn light or in the dark.
- Perform care and maintenance on your bike regularly. In doing so, check important components, particularly the frame, fork, wheel suspension, handlebar, handlebar stem, seat post and brakes for warping and damage. If you notice changes such as cracks, bulges or warping, have your bike checked by a specialist cycle shop before using again.

II. Quick Start Guide:

8 steps to getting on the road (Before the first ride)

CAUTION: E-BIKE OWNERS:

Do not use the battery for the first time until it has been fully charged at least once or you may decrease its performance (see instructions below).

1. Unpack the bike and check the contents

Carefully remove your bicycle and all other items from the box. You may find it easier to open the side of the box and roll the bike out. Ask for assistance if required.

Please check that the following contents, as well as any accessories you may have ordered, are present:

- Correct model, size and style of bicycle
- Pair of pedals (marked L and R on the end of the spindle) (Except Foldable Bike)
- Bike manuals
- Battery Charger (E-bike Only)

2. Charge the battery (E-bike Only)

Once the bike is out of the box, put the kickstand down. You can charge the battery pack on or off the bike. To remove the battery, insert key into the keyhole near the battery and turn to unlock, pick out battery.

NOTE: *Connect the charger to the bicycle when it is not used. This will lengthen the life of the battery pack.*

1. Connect the charger to the mains voltage. The charge indicator of charger will show green.
2. Connect the plug of the charger to the contact point of battery pack, the charge indicator of charger will show red.
3. When the charge indicator of charger shows from red to green. The battery pack is full.
4. Remove the charger before you start cycling.

NOTE: *The battery does not have to be completely discharged before it is recharged. The Lithium battery has no 'memory' and therefore can be charged at any time. It is perfectly acceptable to recharge the battery after a short ride so that the battery is fully charged before the next ride.*

3. Attach the pedals (If need)

Screwing the right pedal into the left crank arm and/or vice versa will seriously damage the pedal and/or crank arm threads and void the warranty.

Apply grease to the threaded end of each pedal. Take care to put the correct pedal on each crank arm (L and R are marked on the ends of the pedal spindle) and carefully tighten using the supplied pedal wrench. Both pedals (each side L and R) thread toward the front of the bike to tighten, and toward the back of the bike to loosen.

4. Adjust the handlebars

Holding the tire in place, straighten the handlebars by loosening the nut(s) on top of the handlebar stem or the two nuts on either side of handlebar stem with an Allen key. Then align the handlebars with the frame and front tire. Tighten the single nut at top of the handlebar stem or tighten the two nuts on either side of handlebar stem depending on your model. To adjust the handlebar tilt or height, loosen the nut(s) on the side or front of the handlebar joint and adjust the handlebars to a comfortable position before tightening. Consult the manual to determine the

correct handlebar height. Check to make sure the brake levers, gear shifts, displayer, bar ends and other parts attached to the handlebars are positioned comfortably. These can all be adjusted using one of the included Allen keys.

5. Adjust the seat

Using an Allen key, loosen the nut on the side of the seat post clamp. Straighten and set the saddle to the correct height and tighten the seat post clamp. If you are not sure what the ideal height is, refer to the manual for guidance. Do not set the seat so high that the max guide line on the seat post is visible.

6. Check and adjust the tire pressure

Check the tire pressure and inflate to proper pressure marked on the tire sidewall.

7. Power on the bike (E-bike only)

Before you ride, insert the battery in the battery holder until it locks in place, and remove the key. Turn on the bike's pedal assist system the handlebar control unit. You should not be pedaling when turning on the power. If the battery is fully charged, all lights next to the power button will be lit. See manual for more information on modes. As you pedal, the motor will provide assistance at the selected power level

8. Check the lights

Check light function. See manual for more information on how to turn on/off.

After its initial break-in period, you might notice that frie shifting and braking need adjustment. This is typical of all new bicycles and simply reflects that cables have stretched or their housings have seated themselves into final position. To keep running at peak performance, we recommend that you take your bicycle to your local bike shop as soon as you notice inconsistencies in your gears or brakes or experiencing any other difficulties.

III. Setting up the bike for the rider

III-1. Fitting the pedals

- Coat both pedal threads with lubricant (grease).

NOTE: The left pedal has a left-handed thread which is normally indicated by an "L" embossed on the axle. The right pedal has a right-handed thread which is normally indicated by an embossed "R".



- Screw the left pedal anticlockwise into the left crank.
- Screw the right pedal clockwise into the right crank (on the side of the bike chain).

III-2. Adjusting the seat position

III-2.1: Adjusting the bike saddle

The seat position is decisive for your well-being and cycling performance

III-2.2: Operating the quick-release device

WARNING:

- All quick-release devices must be tightened securely before you set off. Check this before every journey.
- If you leave your bike unattended, check that all quick-release devices are correctly secured before setting off again.
- When closing the quick-release lever to lock it, it must be necessary to apply a force that causes you to make a first with your hand as otherwise the quick-release device could come loose.

To open the quick-release device, proceed as follows:

- Throw back the quick-release lever so that its inner face or the lettering •Open the quick-release device as far as possible.
- Turn the adjusting nut anticlockwise to further slacken the quick-release device.

To close the quick-release device, proceed as follows:

- Adjust the clamping strength by turning the adjusting nut.
- If the quick-release device closes too easily, open it again and turn the adjusting nut clockwise.
- If the quick-release device still closes too easily repeat the previous step.
- If the quick-release device is too difficult to close, turn the adjusting nut anticlockwise.
- Turn back the quick-release lever from the OPEN position so you can see the outer side of the lever or the lettering CLOSE.PEN is visible.




WARNING:

When closed, quick-release levers must lie flat against the frame, fork and saddle clamp. Make sure that quick-release devices for front hubs point backwards when closed as otherwise they could snag on obstructions when the bike is moving and open. This could lead to serious accidents.

III-2.3: Determining the correct saddle height

- Sit on the bike saddle.
- Try to reach the pedal with your heel when it is in the bottom position. Your knee should be more or less fully straightened out.
- Place the balls of your feet on the centre of the pedal.If your knee is now slightly bent, the saddle height is correct.



WARNING:

Never tighten the seat post if the maximum mark or stop mark is above the top of the seat tube as otherwise you could injure yourself or damage the seat post. Always observe the specified tightening torques.



CAUTION:

The minimum insertion depth is marked on the seat post. If this is not the case, the minimum insertion depth must be 7.5 cm. In frames with long seat tubes that project beyond the top tube, the minimum insertion depth is 10cm.

III-2.4: Adjusting the saddle angle

- Your bike saddle should be as close as possible to horizontal.
- You can make use of longer bike rides to find out what your most comfortable seat position is. If you want to tilt the saddle, try tilting it very slightly forwards. If you tilt the saddle back, this can quickly lead to pain or physical injury.



Adjusting the saddle angle

Adjust the saddle angle as follows:

- Turn the clamping screw anticlockwise to loosen it.
- Tilt the bike saddle to the required angle.
- Turn the clamping screw clockwise to tighten it.

With a suspension seat post

Suspension seat posts reduce vibrations caused by uneven roads thereby reducing stress on the spinal column.

If you need to adjust the suspension elements in the seat post, consult your specialist cycle shop.

III-3. Adjusting the handlebar position

WARNING:

Tighten all screws to the prescribed torque as otherwise screws could shear off and components could come loose or detach altogether.

You can also influence your riding position by changing the handlebar height.

The lower you set the handlebar, the further you will have to lean forwards. This increases the strain on your wrists, arms and upper body and you will need to bend your back further.

The higher the handlebar is, the more upright your riding position will be. This increases the stress on your spinal column due to jolting.

You can determine a handlebar height that best suits your body size as follows:

III-3.1: Adjusting the handlebar position by turning the handlebar

Loosen the hexagon socket screws on the front of the stem. Turn the handlebar until you find the position that is comfortable for you. Make sure that the handlebar is always exactly in the centre of the stem. Now retighten the hexagon socket screws by turning them clockwise. If the tightening torque is stamped on the stem, use this value, and if not, use the tightening torques in Technical data”.



Once you have adjusted the handlebar, you will also need to adjust the brake levers and gear-shift handles. Loosen the hexagon socket screws on the handle grips. Sit on the saddle and put your finger on the lever.

Turn the lever until your hand and lower arm are in a straight line. Retighten the screws in the handle grips by turning them clockwise.

III-3.2: Adjusting the handlebar height with an adjustable handlebar stem (If the E-BIKE is equipped with the adjustable handlebar)

With some types of handlebar stems, you can vary the handlebar tilt. The stem angle can be adjusted via the clamping screws which are on the side of the articulation or the top/bottom of the stem. Models equipped with additional stop notches or adjusting screws are available.

Adjust the handlebar tilt as follows:

- Undo the clamping screw by turning it anticlockwise through two or three revolutions using an Allen key.
- If you own a model that is also equipped with detents, continue turning the clamping screw anticlockwise to disengage the detents.
- If you own a model with integrated stop notch, loosen the screw of the stop notch. In many stem types this is located on the underside of the stem.
- Tilt the handlebar stem to the required angle.
- To fasten the handlebar stem, tighten the clamping screw clockwise using an Allen key. If tightening torques are specified on the stem, use exactly these torques, and if not, refer to the table of tightening torques in.
- In models with an integrated stop notch, tighten the screw of the stop notch carefully clockwise. In doing so, the stop notch must engage with the teeth.




Hexagon socket screw (integrated stop notch)

IV. Frame

The form of the frame depends on the bike type and function. Frames are manufactured from different materials- steel or aluminum alloys or carbon (carbon fiber), for example.

NOTE:

The frame number of the bike is stamped on the seat tube, the head tube or the bottom bracket housing. It may also be found on the motor suspension in E-bike. The bike can be identified the frame number if it is stolen. To identify the bike properly, it is important to note down the whole number in the right order.



WARNING:

Never ride your bike if the frame is warped or cracked. On no account should you attempt to repair damaged parts. This can lead to accidents. Replace defective parts before you ride the bike again. After an accident or crash, have your bike checked by a professional bike workshop before riding it again. If defects on the frame or components go unnoticed this can lead to accidents. If your bike does not roll forwards easily in a straight line, this could mean that the frame is warped. In this case, have the steering stability checked by a professional bike workshop.

V. Headset

The headset is the bearing for the bike fork in the frame. If the headset has been properly adjusted, it will turn easily. In doing so, no play should be evident.

The headset is subject to a large amount of stress due to impacts with the road surface.

This can cause it to come loose or affect its setting. Have the play and ease of movement of the headset checked regularly by your specialist cycle shop.



WARNING:

Checking the headset

If you do not adjust the headset properly or tighten it too tightly, this could cause breakages.

This should therefore always be carried out by a professional bike workshop.

If you ride with the headset loose, Unis could damage the bearing shells or fork.

VI. Fork

The front wheel is held in place by the bike fork. The bike fork consists of two fork blades, the fork crown and steering tube.

The suspension fork is a feature of most mountain bikes, trekking bikes and city bikes. They can be adjusted in different ways and provide a greater degree of riding comfort. Specific information on your suspension fork is provided in the manufacturer's operating instructions which you can find on the CD or the manufacturer's website.

WARNING:

Never ride with a damaged bike fork. Do not attempt to repair a defective bike fork. This can lead to serious accidents.

If you notice that the bike fork is warped or otherwise damaged, replace it before using the bike again.

Avoid sudden changes in ground level and riding off high kerb stones. This can damage the fork and lead to serious accidents.

Check regularly that the screws on the bike fork are securely fastened. If screws are allowed to come loose, this can cause serious accidents.



VII. Chain rings

Chain rings are wear parts. Their service life depends on various factors, e.g.

- Maintenance and care,
- Type of use and distance travelled.

VIII. Bottom bracket and cranks

WARNING:

The cranks must be securely fastened as this could otherwise damage the crank set.

- **The cranks can come loose which is why you should regularly check whether they are securely fastened by attempting to rock**
- **If there is play in the cranks, have the bike checked and the cranks fastened securely by a professional bike workshop.**

IX. Wheels

IX-1. Checking the wheels

The wheels connect the bike with the surface you are riding on. The wheels are subject to a par-

ticularly high level of stress due to unevenness of the riding surface and the weight of the rider. The wheels are carefully checked and trued prior to delivery. However, the spokes may settle when you ride the first kilometer on your bike.

- Have the wheels checked again and trued if necessary after the first 100 kilometer by a specialist cycle shop.
- You should subsequently regularly check the tension in the spokes and have loose or damaged spokes replaced, and/or have the wheel trued, by a specialist cycle shop.
- The wheel can be attached to the frame and fork in a number of different ways. In addition to the standard systems in which the wheel is held on by axle nuts or quick-release devices, different types of floating axles exist. These can be held in place by a screw connection or different types of quick-release devices. If your bike has a floating axle, please also refer to the enclosed manufacturer's user manual or visit the web pages of the relevant manufacturer in the Internet.

WARNING:

Tighten all screws to the prescribed torque as otherwise screws could shear off and components could come loose or detach altogether.

IX-2. Checking the hubs

To check the hub bearings, proceed as follows:

- Lift the wheel and spin it.
- Check whether the wheel continues to turn through several revolutions before it stops moving. If it stops suddenly, the bearing is damaged. This does not apply for front wheels with hub dynamos.
- To determine whether there is play in the hub bearing, try rocking the wheel in the bike fork or rear triangle backwards and forwards perpendicular to the direction of travel.
- If you notice that there is play between the bearings or if you encounter resistance when turning the wheel, have the hub bearing adjusted by a specialist cycle shop.

IX-3. Checking the rims

If you are using a rim brake, the rim is subject to a higher degree of wear.

WARNING:

If a rim is worn it loses stability which makes it more susceptible to damage. If the rim is deformed, cracked or broken this can lead to serious accidents. If you notice changes in a rim on your bike, do not ride on it. Have the problem checked by a professional bike workshop.

IX-4. Tyres

A large number of different tyre types exist. The bike's off-road capability and rolling resistance depend on tread profile.

WARNING:

Only inflate the tyre to the maximum permissible tyre pressure as otherwise it may burst. Inflate the tyre at least to the specified minimum air pressure. If the tyre pressure is too low, the tyre may detach from the rim.

The maximum permissible tyre pressure, and normally also the minimum permissible pressure, can be found on the tyre sidewall.

Always replace the tyre with a tyre of the same type, dimension and profile as otherwise the ride characteristics may be adversely affected. This can lead to accidents.

CAUTION:

Tyres are wear parts. Check the tread depth, tyre pressure and condition of the tyre side-walls regularly. Replace worn tyres before using the bike.

Note:

Note the dimension of the fitted tyre. Standard designations are used when stating the tyre dimension.

- Example 1: "46-622" means the tyre is 46mm wide and the rim diameter is 622mm.
- Example 2: "28 x 1.60 inches" means that the tyre diameter is 28 inches and the tyre width is 1.60 inches.
- The tyre pressure is frequently stated in PSI. Technical data" contains a table which you can use to convert tyre pressures from PSI into bar.

IX-4.1: Inner tubes


The inner tube is necessary to maintain the pressure inside the tyre. It is inflated via a valve.

Three valve types exist:

All three have a cap to protect them from ingress of dirt.

To inflate an inner tube with a Scleverand or road valve, proceed as follows:

- Unscrew the valve cap anticlockwise with your fingers.
- Unscrew the knurled nut anticlockwise.
- Push the knurled nut with your finger briefly into the valve until air escapes.
- Inflate the inner tube using a suitable tyre pump.
- Screw the knurled nut back down.
- Screw the cap clockwise back onto the valve.

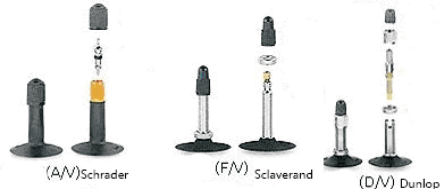

NOTE:

Ask a specialist cycle shop for advice on which tyre pump is suitable for your valve To inflate an inner tube with a Dunlop/Woods valve or Schrader/car valve proceed i follows:

- **Unscrew the valve cap anticlockwise.**
- **Inflate the inner tube using a suitable tyre pump.**
- **Screw the cap clockwise back onto the valve.**



X. Brake, brake levers and brake systems

This User Manual describes the maintenance and handling of typical, commercially available brake components for MTB, ATB, cross and road bikes. For other components, refer to the separate information or enclosed instructions. If you have questions on installation, adjustment, maintenance and operation, please consult a specialist cycle shop.

X-1. Important information and precautionary measures

WARNING:

Have maintenance work on the brakes carried out by a professional bike workshop. Do not allow fluids containing oils to come into contact with the brake pads, brake contact surfaces on the rim, brake blocks or brake disc as this could otherwise impair the effectiveness of the brake.

Brake blocks and brake pads are wear parts. Check the wear condition of these parts regularly. This can be identified by a marking. On the brake block for example, the grooves will no longer be visible. Always replace both brake blocks at the same time.

Use genuine spare parts only as otherwise you could impair the functions of the bike or damage it.

To obtain correct friction pairing, only use brake pads that are suitable for the rim as otherwise the braking distance would be extended and wear increased. With carbon rims in particular, only brake pads that are expressly intended for this purpose should be used. Rubber brake blocks and brake pads must not come into contact with oil or grease. If the rubber brake blocks and brake pads come into contact with oil or grease, this drastically reduces their braking performance and they must be replaced.

WARNING:

Tighten all screws to the prescribed torque as otherwise screws could shear off and components could come loose or detach altogether (see Technical data”).

NOTE:

Brake cables are wear parts. You should check the wear condition of the brake cables regularly and replace these if necessary. Check the brake cable for rust and fraying and replace the cable if it is faulty. If you do not, the brakes could malfunction.

There are different types of brakes, the type of brake depends on what it is used for:

- Hub brakes
- Disc brakes and
- Rim brakes

The brakes can be operated mechanically or hydraulically.

WARNING:

With hub gears, the brake lever that operates the front wheel brake is normally on the right-hand side, and with derailleur gears it is on the left. Remind yourself of the position of the brake lever before you ride off.

If you wish to attach the brake lever on the opposite side of the handlebar, follow the manufacturer's user manual or ask your specialist cycle shop to do this.

X-2. Brake lever

Standard brake lever

The bike is equipped as standard with a suitable brake lever. Check regularly that when you operate the brake lever it does not reach the handlebar and make contact with it. With the brake lever pulled, push the bike forward and check whether the braking performance is sufficient. If the bike rolls slightly forwards, you will need to have the brake cable readjusted or the brake pads replaced.



X-3. Disc brakes

With this brake type, the brake discs are on the hub and the brake caliper is on the frame or fork.

WARNING:

Have your disc brakes adjusted by a specialist cycle shop. If this is done incorrectly, an accident may occur.

Once the brakes have been adjusted, always perform a brake test by pushing the bike quickly forwards and operating the brake lever. You should only use your bike if you can safely stop it using the brakes.

Disc brakes require a brake lead time during which the braking force increases. Bear this in mind throughout the entire brake lead time. The same effect also occurs after replacing the brake block or disc.


If you hear unusual noises when braking, the brake blocks may have reached their wear limit. Allow the brakes to cool down then check the brake block depth. Have the brake blocks replaced if necessary.

WARNING:

When installing, removing and carrying out maintenance on the wheel, do not touch the brake disc with your fingers when it is turning. You could be seriously injured if you catch your fingers in the cutouts of the brake disc. The brake caliper and the disc can become - extremely hot when braking. You should therefore not touch these parts when riding the bike or immediately after dismantling as you could burn yourself. Before adjusting the brakes, check that the parts have cooled down sufficiently.



Disc brake



NOTE: You must only fit a disc brake on your bike providing suitable mounting devices are installed on the frame and the bike fork. If in doubt, consult a specialist cycle shop. If the brake blocks come into contact with oil or grease, they must be replaced. If the brake disc comes into contact with oil or grease, it must be cleaned as otherwise its braking performance will be drastically reduced. Check whether the quick-release lever for the wheel is on the side opposite the brake disc. If the quick-release lever is on the same side as the brake disc, there is a danger you could burn yourself when operating the lever. The heat in the brake disc could also reduce the clamping force of the quick-release device. If the brake disc is worn, cracked or bent it must be replaced. Have this work carried out by a professional bike workshop. If the depth of the brake blocks is less than 0.5mm, they must be replaced.

X-3.1: Hydraulic disc brake

The hand brake lever of the hydraulic disc brake is equipped with a master cylinder. The hydraulic fluid is fed through a tube to the brake cylinders. This actuates the brake pistons which push the brake blocks against the brake disc. This type of brake requires little maintenance and can be very powerful.

WARNING:

Once the brakes have been adjusted, always perform a brake test by pushing the bike quickly forwards and operating the brake lever. You should only use your bike if you can safely stop it using the brakes.

Check regularly, also before each journey, that the lines and connections are tight. If lines and connections are not tight, brake fluid may escape from the brake system. The brake may not work properly as a result.

If fluid escapes from the braking system, do not use the bike and have the necessary repair work carried out immediately by a professional bike workshop.

If you continue riding the bike in this condition, the risk of brake failure is extremely likely.

If the brake blocks come into contact with oil or grease, they must be replaced. If the brake disc comes into contact with oil or grease, it must be cleaned as otherwise its braking performance will be drastically reduced.

X-3.2: Vapor bubble formation

- Vapor bubble formation can occur if the brakes are operated continuously for some time, e. g. during a long steep descent.
Instead of applying gentle pressure continuously with the brakes, operate them for shorter periods, with more force if necessary, releasing the brake lever intermittently.
- Vapor bubbles form if water in the brake fluid heats up, evaporates and forms bubbles in the brake system.
As these are easily compressed, the brake lever travel distance increases.

WARNING:

When transporting or storing the bike upside down, air bubbles can form in the brake system fluid reservoir.

If you then use the bike, the brakes could fail and cause a serious accident.

Once the bike is in the correct riding position, pull the brake lever several times to check whether the brakes respond normally.

NOTE:

Brake pads and brake blocks are wear parts. Have the brake pads of hydraulic disc brakes checked regularly, and replaced if necessary, by a professional bike workshop.

If not, adjust them as follows:

- Adjust the brake lever so it is parallel to the ground and operate it slowly several times so the bubbles return to the reservoir.
- If the response is still poor, the brake system must be vented. Have this work carried out by a specialist cycle shop.

X-3.3: Cleaning the brake system

If the brake blocks come into contact with oil or grease, they must be replaced. If the brake disc comes into contact with oil or grease, it must be cleaned as otherwise its braking performance will be drastically reduced.

- Clean and maintain the brake system using isopropyl alcohol, soapy water or a dry cloth. Do not use commercially available brake cleaning agents or agents to prevent braking noises as these can damage components such as the seals.

X-3.4: Fitting/removing the wheel

- When removing the wheel, we recommend you use a brake block spacer. This prevents the piston from being pushed out if the brake lever is operated once the wheel has been removed. This also prevents air bubbles in the expansion vessel from entering the system.
- If the brake lever is operated and the brake block spacer is not inserted, the pistons may extend further than normal. Put the bike in an upright position to push back the brake blocks. Use a clean flat screw driver or tyre lever and be careful not to scratch the brake blocks. If the brake blocks are not fitted, push the piston back carefully without damaging it. If you have trouble pushing back the brake blocks or piston, remove the reservoir cap and try again. Note that some oil may flow out the reservoir.
- After fitting the wheel, check that the quick-release lever is on the side opposite the brake disc. If it is on the same side as the brake disc, there is a danger of the lever and brake disc obstructing one another and this could also reduce the clamping force of the quick-release device.

XI. Bike gears

XI-1. Derailleur gears

This User Manual describes the handling of typical, commercially available gear-shift components for MTB, ATB, cross. Separate instructions are provided for other components on the CD or on the web pages of the relevant manufacturer in the Internet. If you have questions on installation, adjustment, maintenance and operation, please consult a specialist cycle shop.

WARNING

If gear-shift components are loose, worn, damaged or adjusted incorrectly, this poses a risk of injury to the rider. Have the derailleur gears adjusted at a professional bike workshop.

NOTE: *Always contact your specialist cycle shop if the chain jumps off the chain rings or sprockets when riding or you hear unusual noises or you cannot change gears easily or the rear derailleur, front derailleur or other gear-shift components are loose, damaged or distorted or • chain links are defective or worn.*

WARNING:

The bike chain must not be on the smallest chain ring at the front and the small outer rear sprocket wheel simultaneously. The bike chain must not be on the largest chain ring at the front and large inner sprocket wheel at the rear simultaneously. Otherwise the bike chain could jump off.

Never pedal backwards when changing gears as you could damage the gear-shift mechanism.

Only make changes to the gear-shift system carefully and in small increments. If settings are made incorrectly, the bike chain could jump off the sprocket wheel and cause you to fall off the bike. If you are unsure about what to do, have this work carried out by a professional bike workshop.

NOTE: *Even if the gear system is perfectly adjusted, it can produce noise if the chain is running at an extremely sharp angle. This does not mean it is defective and does not damage the drive. As soon as the chain is at a more shallow angle, the noise will disappear.*

XI-2. Shifting lever

XI-2.1: Standard shifting lever

Both levers a and b always revert to the initial position after they are pressed. The crank must always be turned when a lever is pressed.



Operating the front derailleur shifting lever

Shifting from a small to a large chain ring

Press lever a once to move the chain from a small to a larger chain ring.

Shifting from a large to a smaller chain ring

Press lever b once to move the chain from a large to a smaller chain ring.



Operating the standard rear derailleur shifting lever



Shifting from a small to a larger sprocket

To shift by one gear only, push lever a to position

1. To shift by two gears, push the shifting lever to position


2. You can shift a maximum of 3 gears using this method.

Shifting from a large to a smaller sprocket




Push once to shift to a smaller sprocket

When lever b is operated, there is one click where trimming (the noise prevention mechanism) engages, and a second stronger click when the gear shift stroke is complete. The noise prevention mechanism no longer clicks once the trimming operation is complete which means that only the click—in positions will be heard when shifting between sprockets.




If the chain is on the large chain ring and the large sprocket, the chain will rub the front derailleur producing a characteristic noise. When this happens, press lever b lightly to the point where it clicks, this causes the front derailleur to move slightly towards the smaller chain ring, thereby eliminating the noise.



XI-2.2: Twist-grip shifters

To shift up or down one gear only, turn the twist-grip shifter by one increment forwards or backwards.

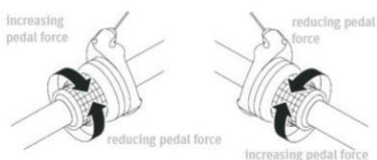

If you wish to shift up or down several gears at once, continue turning the shifting lever by the required number of shift positions and in the required direction.


XI-3. Rear derailleur

NOTE: Have your specialist cycle shop carry out maintenance on the derailleur gears, or replace or adjust them.

XI-3.1: Precision adjustment/rear derailleur

Operate the shifting lever to shift the chain from the smallest sprocket to the second sprocket. Then take up the slack in the shifting cable with the shifting lever and turn the crank.

Turn the screw anticlockwise until the chain rubs against the third sprocket.

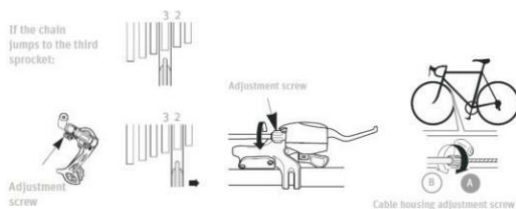


NOTE: The adjustment screw may also be on the shifting lever or on the frame.

Once the slack in the shifting cable has been taken up by the shifting lever, the chain should ideally rub the third sprocket and produce a noise.


Release the shifting lever in second gear and turn the crank.

If the chain rubs the third sprocket, turn the adjustment screw clockwise slightly until the grinding noise stops.

To ensure problem-free SIS operation, you will need to lubricate all power-transmitting parts.



NOTE: If the chain is in the position shown, it could rub against the chain rings or the front derailleur and make a noise. If this is the case, you can shift the chain onto the second or next largest sprocket.



XI-3.2: Cleaning

- Whenever possible, avoid using cleaning agents on the chain. If you use cleaning agents, such as rust remover, this may wash lubricant out of the chain which could lead to malfunctions.
- The chain rings and sprockets should be cleaned regularly using a neutral cleaning agent.
- You should clean the derailleur and lubricate the moving parts (mechanism and rollers) at regular intervals.

XII. Bike chain

There are two types of bike chain:

- A wide bike chain ($\frac{1}{2} \times 3/32$ ") for hub gears
- A narrow bike chain for derailleur gears. These are available in different widths, depending on how many sprockets are on the cassette. Only use chains that are approved for precisely the number of sprocket wheels on your bike. •Clean and lubricate your bike chain regularly.
- To prevent premature wear of the bike chain when using derailleur gears, select gears that keep the chain skew as marginal as possible.

To check the wear in the bike chain, proceed as follows:

- Take the section of the chain that rests on the front chain ring between your thumb and forefinger.
- Pull the bike chain off the chain ring. If the bike chain can be lifted by a significant amount, it is worn and must be replaced by a new one.
- With hub gears, the chain tension must be adjusted so that vertical play of one to two centimeters is present in the unsupported chain span between the chain ring and sprocket wheel.
- To take up the slack in the bike chain, proceed as follows.
- Loosen the rear wheel nuts.
- Pull the wheel back into the dropouts until only the permissible amount of play is present in the bike chain.
- Tighten all screw connections carefully clockwise.

WARNING:

Tighten all screws to the prescribed torque as otherwise screws could shear off and components could come loose or detach altogether (see "Technical data").

Maintenance of bike chains:

Bike chains are wear parts. Bike chains with hub gears wear out after roughly 2000km, and after roughly 1000km with derailleur gears.

WARNING:

If the bike chain is worn, it can break and cause a crash. If your bike chain is worn, have it replaced by your specialist cycle shop before using the bike again.

XIII. Electric system

XIII-1. E-bike fundamental legal principles

The fundamental idea behind the E-bike is not only to be able to cover greater distances more quickly, but also to do this comfortably. You can choose to relax and let the bike do the work, exert yourself more physically, or simply to get from A to B as fast as possible. You can decide this yourself by choosing an appropriate assist level. This gives you more confidence on the road, as the powerful acceleration gives you more control and a greater degree of security. Your E-bike assists you with up to 500W watts of power which takes you up to the speed of 32(km / h).

XIII-2. These statutory requirements apply for a E-bike

- The motor is designed only to provide edaling assistance, i.e. it can only "assist" the rider when he/she turns the pedals.
- The average motor output must not exceed 500 W.
- As the speed increases, the rate at which the motor output reduces must also increase more intensely.
- The motor must switch off once the bike reaches a speed of 32(km / h).
- The motor must switch off once the brake work

XIII-2.1: Meaning for the rider

Check your local state or provincial bylaws in accordance to rules and regulations regarding where you can ride your e-bike and helmet requirements.

XIII-2.2: Pushing assistance (If the E-BIKE is equipped with it)

You can have your specialist cycle shop fit what is known as "pushing assistance" to your bike.

The pushing assistance moves the E-bike slowly at a maximum speed of 6km / h without you having to turn the pedals, e. g. if you are maneuvering in a tight space or are pushing your E-bike out of a basement garage.

The pushing assistance is not suitable for use as starting assistance.

XIV.Control panel (display)

Model: KD986

XIV-1. Product model


Intelligent TFT display for E-bike; model: KD986

XIV-2. Specifications



- 24V/36V/48V Power Supply
- Rated working current :50mA
- The maximum working current: 200mA
- Off leakage current: <1μA
- Operating temperature: -20°C ~ 60°C
- Storage temperature: -30°C ~ 70°C

XIV-3. Appearance and Size

Display appearance and dimension drawing (unit: mm)

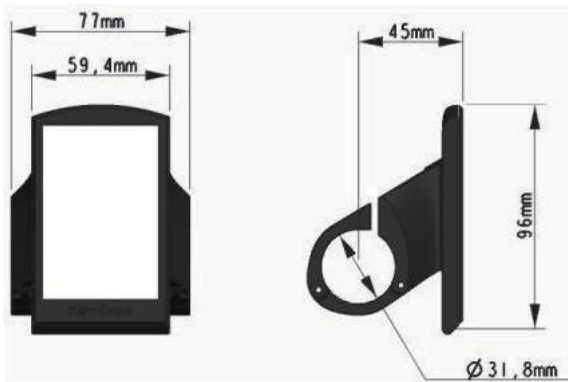

Remote appearance and dimension drawing (unit: mm)



XIV-4. Function Summary

KD986 can provide a lot of functions to fit the Users needs. The indicating contents are as follows:

- Battery and battery percentage indication
- Motor Power indication
- Assistance-level indication
- Speed indication (incl. running speed, Max. speed and Ave. speed)
- Odometer and trip distance
- The push-assistance function
- Trip time indication
- Backlight On/Off
- Error code indication
- USB connection indicator
- Various Parameters Settings (e.g., wheel size, speed-limited, battery level bar, assistance level etc.)

XIV-5. Features

1. High luminance colored LCD with special technology(The glass lens fully and seamlessly fits to screen for better display effects.)
2. Glass lens, full screen, with no plastic edge
3. New appearance, more fashionable, high sense of science and technology
4. The display has no fixed cable harness. Fully apply the latest technology of board-end-connector to the displays. Thus the supply cycle is greatly shortened. It is also good for after

sales service, easier for replacement.



Special technology for lens and screen



Board-end Connector

XIV-6. General Operation

Switching the E-bike System On/Off

Press the power button to switch on the E-bike system.

To hold the power button for 2s, the E-bike system will be switched off. The E-bike system no longer uses the battery power.

When switching off the E-bike system, the leakage current is less than 1 μA .

- When parking the E-bike for more than 10 minutes, the E-bike system switches off automatically.

Display Interface

After switching on the E-bike system, the display will show Speed and Trip Distance as default. Pressing the "i" button to switch between following elements:


Trip (Km) —» ODO (Km) —» Max. Speed (Km/h) —» Avg. Speed (Km/h) —» Time (Min.) .



Display Indication Cycle Interface

Switching Push-assistance Mode On/Off

To activate the push-assistance function, hold the “-” button. After 2s, The E-bike’s drive is activated at a uniform speed of

6 Km/h while the screen displays “”. The push-assistance function is switched off as soon as you release the “-” button on the operating unit .The E-bike system stops the power output immediately.



- Push-assistance function may only be used when pushing the E-bike.

Be aware of danger of injury when the wheels of the E-bike do not have ground contact while using the push-assistance function.



Push-assistance Mode

Switching the Lighting On/Off If the E-BIKE is equipped with the light

To switch on the headlight, press the “” button. The backlight brightness is automatically reduced. Press the “” button again, the lighting can be switched off.



Switching the Lighting Mode On/Off Interface

Assist Level Selection


Briefly press "+" or "-" button to switch between assistance levels so as to change the motor output power, The default assistance level ranges from level "0" to level "5", The output power is zero on Level "0". Level "1" is the minimum power. Level "5" is the maximum power. When you reach "5", press the "+" button again, the interface still shows "5", and blinks at "5" to indicate the power highest. After the power downshift reaches "0", press the "-" button again, the interface still shows "0" and blinks at "0" to indicate the power minimum. The default value is level "1".



Assist Level Interface

Battery SOC Indicator

The five battery bars represent the capacity of the battery. The five battery bars are bright when the battery is in high voltage. When percentage is 0%, the battery needs to be recharged immediately.

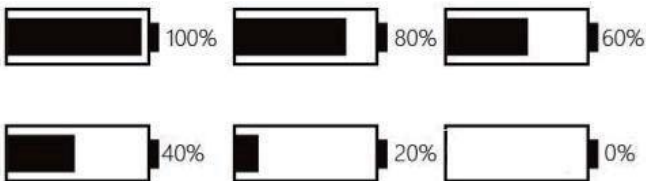

Battery SOC Indication Interface

USB connection indication

When the display is inserted into a USB external device, the display interface will show as below.



USB Connection Indication Interface

Error Code Indication

The components of the E-bike system are continuously and automatically monitored. When an error is detected, the respective error code is indicated in text indication area. Here is the detail message of the error code in **Attached list 1**.

- Have the display repaired when error code appears. Otherwise, you will not be able to ride the bike normally. Please always refer to an authorized dealer.



Error Code Indication

XIV-7. Settings

Press the power button to turn on the display, To access settings menu, hold both the “+” button and the “-” button for 2s. **Display settings** and **Advanced settings** are listed:

- All the Settings are operated on a parked e-bike.



Settings interface


XIV-7.1: Display settings:

Trip Reset

Trip Reset represents trip distance clearance setting.

To reset trip distance, press the “+” button or the “-” button to select the Yes or No. Yes represents clearing a trip distance. No represents not clearing a trip distance.

To store a changed setting, press the “i” button. The default value is NO.

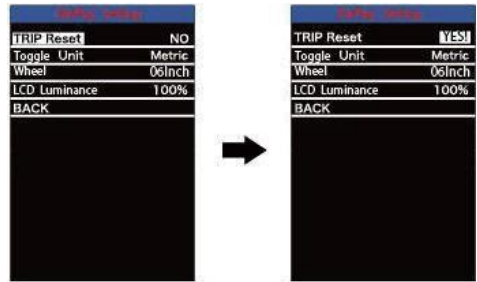

Trip Reset Interface

Toggle Unit

Toggle Unit represents unit conversion settings.

To toggle the unit, press the “+” button or the “-” button to choose the desired unit, and then press the “i” button to confirm.

To store a changed setting, press the “i” button. The default value is “Metric(km)”.



Toggle Unit Interface

Wheel Diameter Settings

Wheel represents wheel diameter settings.

To change basic settings, press the “+” or the “-” button to increase or decrease until the desired value is displayed.

To store a changed setting, press the “i” button. The default value is 28 inch.



Wheel Diameter Settings Interface

LCD luminance settings

LCD luminance represents backlight brightness settings. The default is 100%.

To change the backlight brightness, press the “+” button or the “-” button to choose the desired percentage.

To store a changed setting, press the “i” button.

NOTE: * After Display settings are done, press BACK to return to Settings interface.



LCD Luminance Settings Interface

XIV-7.2: Advanced settings:

Input the correct password to enter the advanced settings interface. The default password is 1212. Enter each digit by pressing “+/-” button and confirm the digits by pressing the “i” button.




Password Input Interface

Assist Levels settings

Assist levels represents assist level mode settings, 8 modes to select: 0-2, 1-2, 0-4, 1-4, 0-6, 1-6, 0-8, 1-8. The default value is 0-6.

To change the mode of assist level, press the “+” or the “-” button to choose the desired mode, and then press the “i” button to confirm.

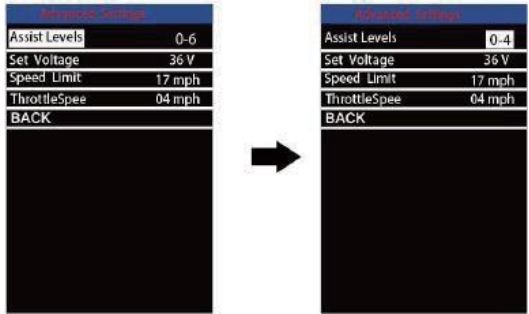


Assist Level Mode setting Interface

Set Voltage settings

Set Voltage represents battery voltage&segment settings. 36V and 48V are switchable. The default voltage is 48V.

5 voltage values of 36V or 48V must be entered one by one. For example, VOL 1 is first bar voltage value. The default value is 41.5V.

To set battery power bar, press the “+” or the “-” button to increase or decrease the value. To store a changed setting and access the second bar, press the “i” button.

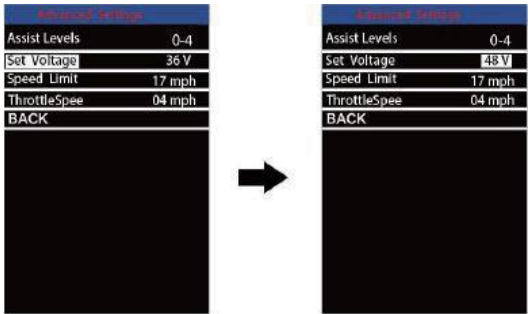

Battery Settings Indicator Interface


After 5 voltage values are entered completely, press the “i” button to confirm and save the settings.

Speed Limit Settings

Speed Limit represents the limited speed settings. When the current speed is faster than speed limit, the E-bike system will switch off automatically. Speed limit range is 15Km/h to 99.9Km/h.

To change basic settings, press the “+” or the “-” button to increase or decrease until the desired value is displayed.

To store a changed setting, Press the “i” button. The default value is 27 Km/h.

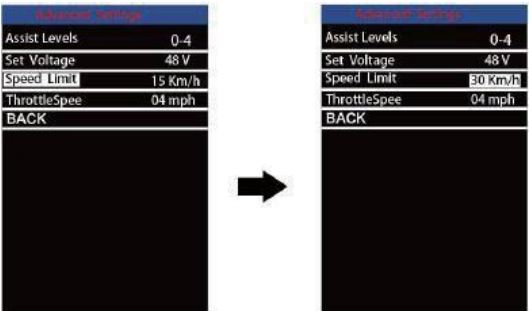

Speed Limit Settings Interface

Throttle speed limit settings:

Throttle speed represents throttle speed limit. The optional values are 6/25/30/99.9 km/h.

To change the basic settings, press the "+" or the "-" button to increase or decrease until the desired value is displayed.

To store a changed setting, Press the "i" button. The default value is 06 Km/h

- If there is not any operations in one minute, the display will exit the settings state.



Assist Level Settings	
Assist Levels	0-4
Set Voltage	48 V
Speed Limit	17 mph
ThrottleSpeed	06 Km/h
BACK	



Assist Level Settings	
Assist Levels	0-4
Set Voltage	48 V
Speed Limit	17 mph
ThrottleSpeed	30 Km/h
BACK	

Throttle speed limit settings

XIV-8. Quality Assurance and Warranty Scope

XIV-8.1: Warranty

1. The warranty will be valid only for products used in normal usage and conditions.
2. The warranty is valid for 24 months after the shipment or delivery to the customer.


XIV-8.2: Others

The following items do not belong to our warranty scope.

1. The display is demolished.
2. The damage of the display is caused by wrong installation or operation.
3. Shell of the display is broken when the display is out of the factory.
4. Wire of the display is broken.
5. The fault or damage of the display is caused by the force majeure (e.g., fire, earthquake, etc.).
6. Beyond Warranty period.

Connection Layout

Connector wire sequence

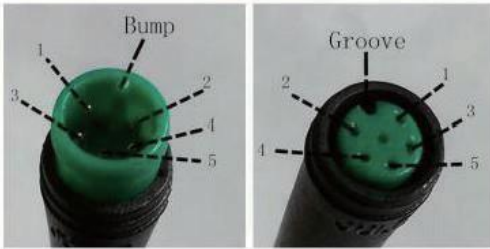

Display-side connector

mating connector

Wire sequence table

Wire No.	Color	Function
1	Red(VCC)	+
2	Blue(K)	Lock
3	Black(GND)	-
4	Green(RX)	RX
5	Yellow(TX)	TX

- Some wire use the water-proof connector, users can not see the inside color.

XIV-9. Operation Cautions

- Be cautious. Don't attempt to disconnect the connector when battery is on power.
- Try to avoid hitting.
- Do not modify system parameters to avoid parameters disorder.
- Make the display repaired when error code appears.

NOTE: *This manual instruction is a universal version for DISPLAY KD986. Some versions of this display may be different from specification to specification as to the software. Please always refer to an actual version.

Attached list 1: Error code definition

Error code	Definition
21	Current Abnormality
22	Throttle Abnormality
23	Motor Abnormality
24	Motor Hall Signal Abnormality
25	Brake Abnormality
30	Communication Abnormality

XV. Assistance by the electric motor

XV-1. Operating principle of assistance

The motor provides support as soon as you switch the assistance on and start pedaling.

The thrust delivered by the motor depends on three factors:

- Your own pedaling effort
The motor adapts to the force you apply. If you pedal harder, e.g. uphill or when setting off, the power sensor detects this and increases the thrust accordingly. However, the thrust is limited by the maximum motor output.
- The assist level you have selected
With the higher assist level, the power delivered by the motor is added your own effort.
- The speed at which you are currently travelling
When you set off on your E-bike, the assistance increases as you build up your speed until your bike reaches its maximum speed of 32km / h. and switches off at roughly 32km / h. This happens irrespective of the gear you are using.

XV-2. Distance

The distance you can travel using the power assist with the battery fully charged depends on several factors:

- Ambient temperature
If it is colder, you will travel a shorter distance with the same battery charge.
To maximize the distance you can travel, keep the battery in a heated room so that it is at room temperature when you fit it on your E-bike.
As the battery discharges when the motor is in use, it generates enough of its own heat to not lose too much of its power at low temperatures.
- Selected assist level
If you want to cover a large distance assisted by the motor, select the lower gears, i.e. the ones that are easier to pedal. Also change to lower assist level
- Handling
If you are riding in gears that are harder to pedal and select a high level of assistance, e. g. when riding uphill, the motor will provide support with plenty of power. However, this leads to higher consumption, as with driving a car at high speed on the motorway. You will therefore have to recharge the battery sooner. You can conserve energy when riding your bike not just by turning the pedals, but also by applying even pressure throughout each crank revolution.
- Technical condition of your E-bike
Make sure tyre pressure is correct. If you ride your bike with too little air in the tyres, this can significantly increase the rolling resistance. The distance you can travel also decreases if the brakes are rubbing.

XVI. Battery

Your battery is a lithium cobalt battery, the ideal type of lithium-ion (Li-ion) battery for this application. One of the main benefits of this type of battery is its low weight combined with a high capacity. Li-ion batteries only weigh half as much as comparable nickel metal hybrid or nickel-cadmium batteries. This means you carry less battery weight and more battery power.

XVI-1. Straightforward charging

- There is no memory effect. You can therefore fully recharge your battery after every trip.
- Recharge the battery after every trip. This means you can set off immediately the next time you use your bike and you also increase the service life of the battery.
- If you are not using the battery, you must recharge it after 3 months at the latest.

XVI-2. High degree of safety due to battery management


- The battery cannot be damaged as a result of a short-circuit. If this were to happen, the battery management would switch off the battery.
- You can simply leave the battery standing in the charger as it prevents overcharging.

XVI-3. Straightforward storage

- If you do not need your battery for a while, store it at a temperature of +10 °C at three quarters of its LiI charge capacity. •The battery enters sleep mode to prevent it from totally discharging.
- These benefits are available due to highly effective battery management that has been adapted to this specific application and by tuning the battery for operation with a 500 watt motor.

NOTE: Observe the following points to increase the service life of your E-bike battery:


- Make sure that the battery is fully charged before you ride your bike for the first time or after you have not used it for a while.
- You should run the battery all the way down to empty for the first three charging cycles. This allows the battery to reach its maximum capacity.
- If you continuously run the battery to empty during normal operation, this reduces its service life.
- If you partially recharge the battery frequently during normal operation, this has a favourable effect on its service life.
- You should therefore partially recharge the battery whenever possible: Try not to run the battery all the way down to empty and recharge it even after a short period of operation.
- If you are having problems with the battery, place it in the charger for one minute. A reset occurs, during which the battery management disables sleep mode for example. After this, the battery will work again.
- Ideally you should charge the battery at a temperature of between +10° C and +30 °C. It takes longer to charge the battery at low temperatures, the battery will not charge up at temperatures higher than +30 °C. Ideally, you should charge and store the battery inside your house or in a warm garage when the outside temperature is low. In this case you should only fit the battery on your bike just before using it
- If you are transporting your E-bike by car, take the battery out of its holder and transport it separately.
- The battery is ideally stored for longer periods charged to 75% of its capacity at a temperature of +10 °C.

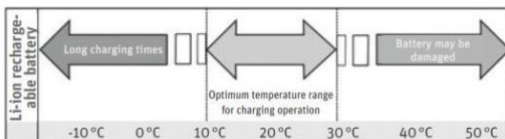

Charging times at different temperatures

XVI-4. Battery information system

There is a control panel with four LEDs and a button ("Push") on the side of the battery that faces outwards. The LEDs light up if you press the "Push" button. Information about the battery and its charge state is provided based on the number of LEDs that light up and the way in which they light up.



XVI-5. Service life and warranty

XVI-5.1: The electric drive

The electric drive is a fully-developed durable and maintenance-free electric drive. It is a wear part for which a two-year warranty applies.

XVI-5.2: The battery

Batteries are wear parts. Wear parts also come with a two-year warranty.

If the battery develops a fault during this period, your specialist cycle shop will of course replace it. A fault does not constitute normal ageing and battery wear.

The service life of the battery depends on different factors. The most important wear-relevant factors are :

- The number of charge cycles and
- The age of the battery.

When you have fully charged and discharged your battery 400 times, it will still have 80% of its initial capacity,

Providing it has been well looked after:

From a technical standpoint therefore, the battery is "used" at this point. It also goes without saying that the battery ages. Even if you do not use your battery, its capacity reduces.

Providing you can still cover the journey distances with this remaining battery capacity, you can of course continue using it. If the capacity is no longer sufficient, you can take your battery to a specialist cycle shop who will dispose of your battery and supply you with a new one.

- You can extend the service life of the battery by fully recharging it after every journey, even if it is small. The li-ion cobalt battery has no memory effect.
- You can also extend the service life of the battery by using the assistance selectively. Avoid, for example, using gears that make pedaling difficult with the most powerful assist level.

XVI-6. Battery Holder

XVI-6.1: Down tube type

Remove the battery: open the lock of the battery box, turn the key, Pull down to remove the battery.

Charging position: Connect the charger interface at this position.



XVII. Charger

Read the two stickers on the charger before using it for the first time.

WARNING:

Do not use other chargers. Only charge the battery using the charger provided,

NOTE: *If used incorrectly, the device may be damaged or inflict injuries.*


- Before cleaning the charger, always pull the plug out of the socket to avoid a short-circuit and/or physical injury.
- Only use the charger in dry rooms.
- Only place the charger in a secure stable position on a suitable surface.
- Do not cover the charger or place any objects on it as otherwise it could overheat and catch fire.

XVII-1. Structure Diagram of Charger



- ① Dpower cord plug ② power cord terminal ③ charging port ④ Charger

XVII-2. Charge Curve Graph



XVIII. Care and maintenance of the bike

XVIII-1. Care

WARNING:

Do not allow care products or oils to come into contact with brake pads, brake discs and the rim's brake contact surfaces. This could reduce the effectiveness of the brake.

NOTE: *Do not use a powerful water jet or high-pressure cleaner. If water under high pressure is directed at the bike, it can enter the bearings. This can dilute the lubricant which increases friction. This leads to rusting and irreparable damage to the bearings.*

Do not clean your bike with:

- Acids
- grease
- hot oil
- brake cleaners (apart from brake discs) or
- fluids containing solvents

These substances attack the surface of the bike and accelerate wear.

Dispose of used lubricants, cleaning agents and care products in an environmentally sound manner. Do not pour these substances into the domestic waste, down the drain or into natural water bodies or the soil.

How well the bike works and how long it lasts depends on how well you look after it.

- Clean your bike regularly using hot water, a small amount of cleaning agent and a sponge.
- You should also always take this opportunity to check your bike for cracks, dents or material deformation.
- Have defective parts replaced before you ride the bike again.
- Touch up damaged paintwork.

Treat all parts that are susceptible to corrosion more frequently than other parts with preservatives and care products, especially during the winter and in aggressive environments such as coastal regions as otherwise your bike will corrode (rust) more powerfully and quickly.

Clean all galvanized and chrome-plated parts as well as stainless-steel components regularly. Preserve these parts after cleaning with spray wax. Make sure that wax does not come into contact with brake discs and rims. If you stop using your bike for a while, in the winter for example, store it in a dry place at a constant temperature. Before putting your bike into storage, inflate both tyres to the prescribed tyre pressure.

To find out more important information on looking after your bike, visit the Internet pages of the relevant component manufacturer.

XVIII-2. Wear parts

Your bike is a technical product that must be regularly checked.

Many parts on your bike are subject to a higher degree of wear due to their function and depending on their use.

NOTE: *Have your bike checked regularly at a professional bike workshop and have the wear parts replaced.*

XVIII-3. Tires

Due to their function, bike tires are subject to wear. Tires depends on how the bike is used and the rider can influence this significantly.

Do not brake so sharply that the wheels lock.

- Check the tire pressure regularly. The maximum permissible tire pressure, and normally also the minimum permissible pressure, can be found on the tire wall.
- If necessary, inflate the tire up to the specified value. This reduces wear.
- Do not expose tires to things that can damage them such as sunlight, petrol, oil, etc.

XVIII-4. Rims in conjunction with rim brakes

Owing to the interaction of the rim brake with the rim, not only the brake pad but also the rim is subject to function-related wear. If fine cracks appear or the rim flanges deform when the tire pressure increases, this indicates increased wear. Wear indicators on the rim allow its wear condition to be easily identified.

Check the wear condition of the rim at regular intervals.

XVIII-5. Brake pads

The brake pads on rim, roller, drum and disc brakes are subject to wear, the extent of which depends on how the bike is used. If the bike is ridden in hilly regions, or used in a sporty manner, the brake pads may need to be replaced more often. Check the wear condition of the pads regularly and, if necessary, have them replaced by a professional bike workshop.

XVIII-6. Brake discs

Brake discs also wear out as a result of intensive braking, or during the course of time. Find out from the manufacturer of your brakes or your specialist cycle shop about the respective wear limits. You can have worn brake discs replaced at a professional bike workshop.

XVIII-7. Bike chains or toothed belts

The bike chain is subject to function-related wear the extent of which depends on care/maintenance and how the bike is used (mileage, rain, dirt, salt, etc.).

- To increase the service life of the bike, clean the bike chains and toothed belts regularly and lubricate the chain.
- Have the chain replaced by a professional bike workshop once its wear limit has been reached (20 "Bike chain").

XVIII-8. Chain rings, sprocket wheels and jockey wheels

In bikes with derailleurs gears, the sprocket wheels, chain rings and jockey wheels are subject to function-related wear. The extent of the wear depends on care/maintenance and how the bike is used (mileage, rain, dirt, salt, etc.).

- To increase the service life of the bike, you should clean and lubricate these parts regularly.
- Have them replaced by a professional bike workshop once their wear limit has been reached.

XVIII-9. Lamps of lighting set

Bulbs and other lamps are subject to function-related wear and therefore may need to be replaced.

- In case you need to replace damaged bulbs, always carry spare ones with you.

XVIII-10. Handlebar tapes and handle grips

Handlebar tapes and handle grips are subject to function related wear and therefore may need to be replaced.

- Check regularly that the handles are securely seated.

XVIII-11. Hydraulic oils and lubricants

The effectiveness of hydraulic oils and lubricants decreases over time. If lubricants are not replaced, this increases the wear of the relevant components and bearings.

- Clean and reduplicate all relevant components and bearings regularly.
- Have the brake fluid for disc brakes checked regularly, and replaced if necessary.

XVIII-12. Gear-shift and brake cables

Carry out regular maintenance on all Bowden cables.

Have defective parts replaced at a professional bike workshop. This may be necessary especially if the bike is often left outdoors and is exposed to the effects of the weather.

XVIII-13. Paint finishes

Paint finishes require regular care, this also ensures that your bike looks good.

- Check all painted surfaces regularly for damage and touch up immediately if required.
- Consult your specialist cycle shop for advice on how to care for your bike's surface finishes.

XVIII-14. Bearings

All bearings on the bike, such as the headset, wheel hubs, pedals and bottom brackets, are subject to function-related wear which depends on the intensity and duration of use and how well the bike is looked after.

- Check these parts regularly.
- Clean and lubricate them regularly.

XIX.Regular inspections

It is advisable to have your E-bike serviced regularly after bedding-in phase. The schedule given in the table below is rough guide for cyclist who ride their bicycle between 1.000 and 2,000km or 50 to 100 hours of use a year. If you consistently ride more or if you ride a great deal on poor road surface. The maintenance periods will shorten accordingly.

Component	What to do	Before every ride	Monthly	Annually	Other Intervals
Lighting	Check function	•			
Tyres	Check pressure	•			
	Check tread and side wall		•		
Brake	Check lever travel, wear of brake pads, position of pads relative to rim, test brake in stationary	•			
Brake pads	Clean		•		
Suspension fork	Check and retighten bolts, if necessary			•	
	All-inclusive service(change oil or grease elastomers			•	

Component	What to do	Before every ride	Monthly	Annually	Other Intervals
Rim	Check thickness, replace if necessary				•After second set of brake pads at the latest
Bottom bracket	Check for bearing play		•		
	Dismount and regrease (cups)			•	
chain	Check and grease, if necessary	•			
	Check wear, replace, If necessary				•After 800km or 40 hours of use
crank	Check and retighten, if necessary		•		
Painted/anodized surface	polish				•at least every 6 months
Wheels/spokes	Check for trueness and tension		•		
	True or retighten				•if necessary
Handlebars and stem	Check and replace, If necessary				
headset	Check for bearing play		•		
	Regrease			•	
Metal surface	Polish(except :rim sides of rim-brake, rotors)				•at least every 6 months
Hubs	Check for bearing play		•		
	Regrease			•	
Pedals	Check for bearing play		•		
Seat post/stem	Check bolts		•		
	Disassemble and regrease			•	
Derailleur	Clean and grease		•		
Bots and nuts	Check and retighten, if necessary		•		
Valves	Check seat	•			
Cable gears/ Brake	Dismount and checkseat			•	

If you have a certain degree of mechanical skills, experience and suitable tools. Such as torque wrench, you should be able to do checks mark by yourself .if you will come across any defects, take appropriate measures without delay, if you are doubt or if you have any question, Contact our dealer.

XX. Technical data

XX-1. Maximum permitted gross weight of bike

The maximum permitted gross weight of the bike comprises the weight of the bike, the weight of the rider and the weight of the luggage. It also includes the laden weight of a trailer.

BIKE TYPE	MAXIMUM PERMITTED GROSS WEIGHT	WEIGHT OF RIDER
Mud Adder	130KG	100KG
Viper&Viper 48	130KG	100KG
Copperhead	130KG	100KG
Copperhead ST	130KG	100KG
Anaconda	130KG	100KG

XX-2. Tightening torques for screw connections

WARNING:

Only use a suitable tool, a torque wrench for example, to tighten the screw connections as otherwise the screws could shear off or break.

NOTE: If you tighten screws too tightly, this could damage the components. You should therefore always observe the prescribed tightening torque.

SCREW CONNECTION	THREAD	TIGHTENING TORQUE (NM)
Crank arm	M8x1	30
Pedal	9/16"	30
Axle nuts, front	gen.	25
Axle nuts, rear	gen.	30
Stem expander bolt wedge	M8	23
Stem, A-head, handlebar clamping fixture	M5/M6/M7	M5:5/M6:10/M7:14
Stem, A-head, head tube	M5/M6/M7	M5:5/M6:10/M7:14
Bar end, outer clamp	M5/M6	M5:5/M6:10
Seat post, clamp	M8/M6	M8:20/M6:10
Seat post, saddle clamping bracket	M7/M8	M7:14/M8: 20
Front derailleur clamp	M5	5
Brake, pad	M6	10
Brake, cable clamp	M6	10
Sidewall dynamo, fixing	M6	10
Disc brake calliper	M6	8 to 10
Shifting lever clamp	M5	5
Brake lever clamp	M5	5
V-brake, fastening screw	M6	10
Freewheel fastening screw	n. a.	40
Cassette, lock ring	n. a.	30

NOTE: These values are reference values, observe the values in the enclosed operating instruction of the component manufacturer.

XX-3. Tires and tire pressure

The tires should be pumped up to within the range stated on the sidewall. This should be regularly checked as running with the correct pressures will ensure maximum range from a full battery.

XXI. Warranty conditions

Read chapter "Care and maintenance of the bike carefully. Comply with the inspection and maintenance intervals specified in Chapter "Regular inspections". Compliance with the service intervals is a prerequisite for the assertion of warranty claims.

The statutory warranty period is two years. This starts when the bike is handed over by the specialist cycle shop who is also your contact partner for warranty claims.

As proof of purchase and date of handover, please retain the handover document signed by both parties and record of purchase, such as the invoice and/or sales receipt, for the duration of the warranty period.

XXI-1. Prerequisites for the validity of warranty claims

- Manufacturing, material or information error.
- The problem or error already existed at the time of handover to the customer.

XXI-2. Warranty exclusions

A warranty claim applies only for the initial faultiness of the defective part.

The following are excluded from the:

warranty:

- Damage caused by use in competitions, improper use and force majeure.
- All parts that are subject to function-related wear, providing this is not a production or material fault.
- Damage caused by incorrect or insufficient care and unprofessional repairs, conversions or replacement of components on the bike. This User Manual contains detailed information on how to look after your bike.
- Accident damage or damage caused by other external factors, providing this is not attributable to incorrect information or a product error.
- Repairs carried out with used parts or damage that occurs as a consequence of this.
- Special equipment or accessories or non-standard equipment; especially technical changes, i.e. to the Gear shift system or the bike fork and frame geometries.
- Non-compatible add-on components that were not part of the scope of delivery at the time the product was handed over, or damage caused by unprofessional installation of these add-on components.

